
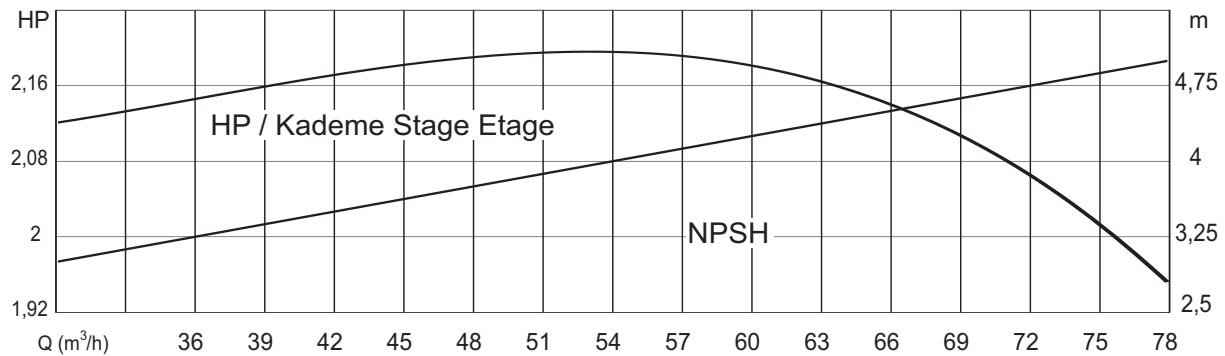
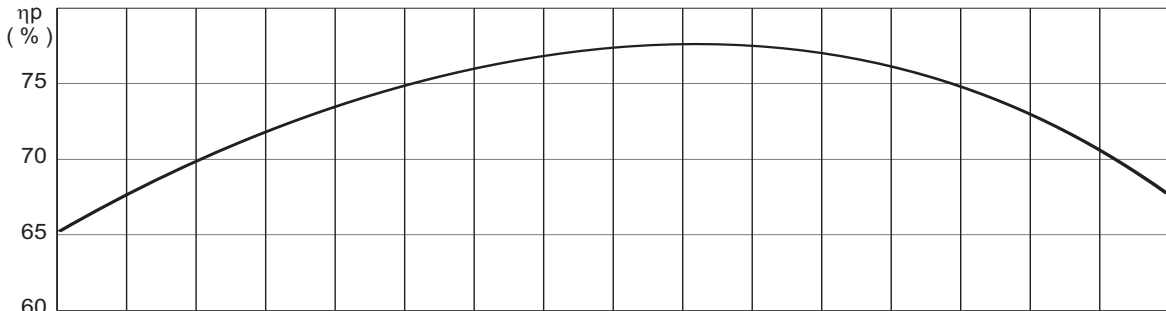


Dönüş Hızı Rotation Speed Vitesse de Rotation 2900 RPM / Tours/min	Dönüş Yönü / Rotation Saatin Tersi Yönünde Counterclockwise Sens Anti - Horaire	Klepe Çıkışı / Outlet / Sortie 4" İçten Pasolu 11 Dış 4" Inside Threaded 11 TPI 4" Fileté Interieur 11 TPI	Mil Ucu / Shaft End / Fin d'Arbre NEMA Standardına Uygun According to NEMA En Accord Norme NEMA	Mil Çapı Shaft Diameter Diamètre d'Arbre 20 mm	Tarih / Date 03 / 2009
					Rev. 0

Q (l/mn)	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
Q (l/s)	10,0	10,8	11,7	12,5	13,3	14,2	15,0	15,8	16,7	17,5	18,3	19,2	20,0	20,8	21,7

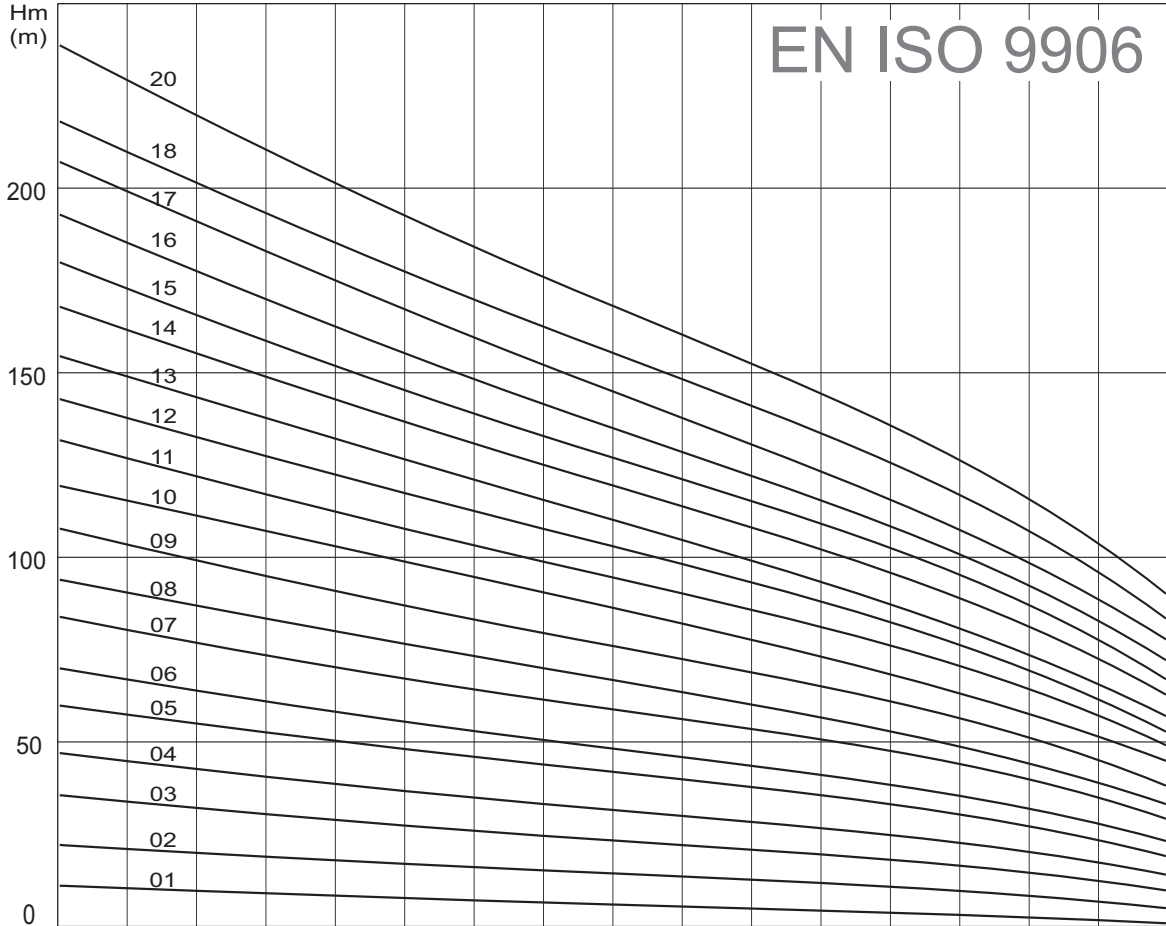


S6 SP60 SERIES

TEKNİK RESİMLER VE TABLOLAR TECHNICAL DRAWINGS AND CHARTS SCHEMAS ET DIAGRAMMES TECHNIQUES

MALZEME LİSTESİ		MATERIALS DESCRIPTION EN		DESCRIPTION MATERIAUX FR	
PARÇA ADI	MALZEME	PART NAME	MATERIAL	NOM DE PIECE	MATERIEL
Mil	Paslanmaz çelik (AISI 420)	Shaft	Stainless steel (AISI 420)	Arbre	Acier inox (AISI 420)
Emiş	Paslanmaz çelik (AISI 304)	Support	Stainless steel (AISI 304)	Support	Acier inox (AISI 304)
Kaplin	Paslanmaz çelik (AISI 304)	Coupling	Stainless steel (AISI 304)	Accouplement	Acier inox (AISI 304)
Kaplin civatası	Paslanmaz çelik (AISI 304)	Coupling screw	Stainless steel (AISI 304)	Vis d'accouplement	Acier inox (AISI 304)
Orta burç	Kauçuk/Çelik	Bearing	Rubber/Steel	Coussinet	Caoutchouc / Acier
Difüzör	Paslanmaz çelik (AISI 304)	Diffuser	Stainless steel (AISI 304)	Diffuseur	Acier inox (AISI 304)
Aşınma bileziği	Kauçuk/Çelik	Wear ring	Rubber/Steel	Bague d'usure	Caoutchouc / Acier
Fan	Paslanmaz çelik (AISI 304)	Impeller	Stainless steel (AISI 304)	Roue	Acier inox (AISI 304)
Konik kama	Paslanmaz çelik (AISI 304)	Bushing	Stainless steel (AISI 304)	Clavette	Acier inox (AISI 304)
Konik kama somunu	Paslanmaz çelik (AISI 304)	Nut	Stainless steel (AISI 304)	Ecrou	Acier inox (AISI 304)
Klepe 4" çıkışlı 11 diş	Paslanmaz çelik (AISI 304)	Valve body 4" 11 TPI	Stainless steel (AISI 304)	Corps du clapet 4" sortie 11 TPI	Acier inox (AISI 304)
Klepe disk	Paslanmaz çelik (AISI 304)	Valve	Stainless steel (AISI 304)	Disque de clapet	Acier inox (AISI 304)
Klepe yayı	Paslanmaz çelik (AISI 304)	Valve spring	Stainless steel (AISI 304)	Ressort de clapet	Acier inox (AISI 304)
Süzgeç	Paslanmaz çelik (AISI 304)	Strainer	Stainless steel (AISI 304)	Crépine d'aspirant	Acier inox (AISI 304)
Kablo muhafaza sacı	Paslanmaz çelik (AISI 304)	Cable guard	Stainless steel (AISI 304)	Gaine de câble	Acier inox (AISI 304)
Lama	Paslanmaz çelik (AISI 304)	Tie-bolt	Stainless steel (AISI 304)	Tirant	Acier inox (AISI 304)

OPSİYONLAR	OPTIONS	LES OPTIONS
Pompa grubu : Soğutma kılıfı	Motor-pump : Cooling shroud	Moteur & Pompe: Chemise de refroidissement

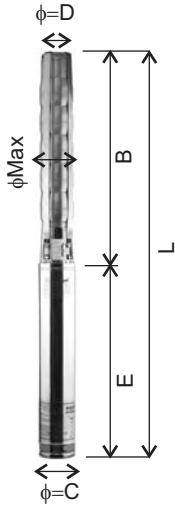

POMPA TIPI PUMP TYPE TYPE DE POMPE	MOTOR MOTEUR		ÖLÇÜLER / DIMENSIONS (mm)						AĞIRLIK / WEIGHT / POIDS (kg)		
	HP	kW	L	E	B	Ø = C	Ø = D	Ø MAX	MOTOR MOTEUR	POMPA PUMP POMPE	TOPLAM TOTAL
S6 SP60 / 01	3	2,2	892	509	383	145	4"	152	18	6,9	24,5
S6 SP60 / 02	5,5	4	1106	610	496	145	4"	152	45	9,2	54,2
S6 SP60 / 03	7,5	5,5	1259	650	609	145	4"	152	50	11,5	61,5
S6 SP60 / 04	10	7,5	1412	690	722	145	4"	152	55	13,7	68,7
S6 SP60 / 05	12,5	9,2	1565	730	835	145	4"	152	60	16	76,0
S6 SP60 / 06	15	11	1728	780	948	145	4"	152	65	18,3	83,3
S6 SP60 / 07	17,5	13	1841	780	1061	145	4"	152	65	20,6	85,6
S6 SP60 / 08	20	15	2054	880	1174	145	4"	152	77	22,9	99,9
S6 SP60 / 09	25	18,5	2267	980	1287	145	4"	152	88	25,1	113,1
S6 SP60 / 10	25	18,5	2380	980	1400	145	4"	152	88	27,4	115,4
S6 SP60 / 11	30	22	2543	1030	1513	145	4"	152	93	29,7	122,7
S6 SP60 / 12	30	22	2656	1030	1626	145	4"	152	93	32	125,0
S6 SP60 / 13	35	26	2849	1110	1739	145	4"	152	105	34,3	139,3
S6 SP60 / 14	35	26	2962	1110	1852	145	4"	152	105	36,5	141,5
S6 SP60 / 15	35	26	3075	1110	1965	145	4"	152	105	38,8	143,8
S6 SP60 / 16	40	30	3268	1190	2078	145	4"	152	112	41,1	153,1
S6 SP60 / 17	50	37	3401	1210	2191	145	4"	152	114	43,4	157,4
S6 SP60 / 18	50	37	3514	1210	2304	145	4"	152	114	45,7	159,7
S6 SP60 / 20	50	37	3740	1210	2530	145	4"	152	114	50,2	164,2



POMPA TIPI PUMP TYPE TYPE DE POMPE	MOTOR MOTEUR		m ³ /h l/sn	0,0	30,0	36,0	42,0	48,0	54,0	60,0	66,0	72,0	78,0
	HP	kW		0,00	8,33	10,00	11,66	13,33	15,00	16,66	18,33	20,00	21,66
S6 SP60 / 01	3	2,2	Basma Yüksekliği (m) Head In Meters Hauteur Manométrique Totale En Metres	14	11	10	8	7	6	5	4	2	1
S6 SP60 / 02	5,5	4		28	22	20	18	16	14	13	11	8	5
S6 SP60 / 03	7,5	5,5		41	36	32	28	26	24	21	18	14	10
S6 SP60 / 04	10	7,5		56	47	43	38	35	32	28	25	20	14
S6 SP60 / 05	12,5	9,2		69	60	55	50	46	42	38	33	27	19
S6 SP60 / 06	15	11		82	70	64	58	53	48	44	38	32	23
S6 SP60 / 07	17,5	13		97	84	77	70	64	59	54	47	40	29
S6 SP60 / 08	20	15		110	94	87	80	73	67	60	53	44	33
S6 SP60 / 09	25	18,5		125	108	99	91	83	76	69	61	51	38
S6 SP60 / 10	25	18,5		140	120	111	102	95	87	78	68	57	45
S6 SP60 / 11	30	22		154	132	122	112	103	95	86	76	64	49
S6 SP60 / 12	30	22		166	143	133	122	112	103	94	83	68	53
S6 SP60 / 13	35	26		179	155	143	132	121	110	100	87	73	57
S6 SP60 / 14	35	26		194	168	156	142	130	120	109	96	80	63
S6 SP60 / 15	35	26		210	180	166	152	138	127	116	103	86	67
S6 SP60 / 16	40	30		222	193	178	162	148	135	123	108	92	72
S6 SP60 / 17	50	37		240	207	192	175	158	145	132	116	97	78
S6 SP60 / 18	50	37		251	218	202	185	170	155	141	126	107	83
S6 SP60 / 20	50	37		278	239	220	201	184	168	153	136	115	90

IMPO ürünleri üzerinde değişiklik yapma hakkına sahiptir
IMPO reserves the right to modify products without a prior notice
IMPO se réserve le droit de modifier des produits sans avis préalable